



**Ceiling-mount and wall-mount models with various options for small to large bathrooms**

- Selectable Airflow\*
- Quiet Operation
- LED\*, Humidity\*, Occupancy\*
- Low-Profile Design
- Wall/Ceiling Mounting
- ETL listed for use over bathtubs and showers when connected to GFCI protected branch circuit (ceiling installation only)
- Damp Location Rated


\*select models

[Find more details in our online catalogue](#)

## Technical parameters


| Nominal data                     |                            |     |
|----------------------------------|----------------------------|-----|
| Voltage (nominal)                | 120                        | V   |
| Frequency                        | 60                         | Hz  |
| Phases                           | 1~                         |     |
| Input current                    | 0.25                       | A   |
| Air flow                         | 110; 130; 150              | cfm |
| Temperature of transported air   | max 104                    | °F  |
| Protection/Classification        |                            |     |
| Insulation class                 | A                          |     |
| Certificate                      | Energy Star, California 24 |     |
| Dimensions and weights           |                            |     |
| Duct dimension; Circular, outlet | 6                          | in. |
| Weight                           | 13.9                       | lb  |
| Optional                         |                            |     |
| Duct connection type             | Circular                   |     |
| Motor type                       | DC                         |     |

## Performances

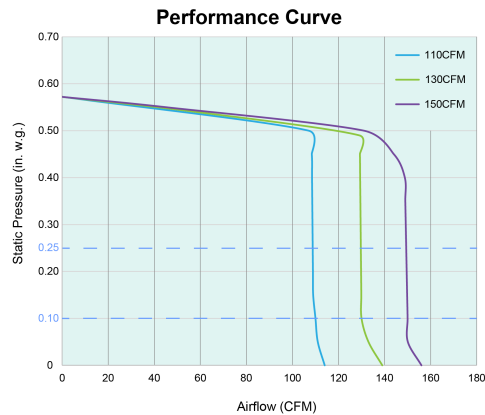

| HVI Certified Rating(s)   |                     |                     |                 |
|---------------------------|---------------------|---------------------|-----------------|
| Static Pressure (in. Wg.) | Rated Airflow (CFM) | Rated Noise (Sones) | Rated Power (W) |
| 0.1                       | 110-130-150         | 0.5-0.7-0.9         | 7.4-10.2-11.6   |
| 0.25                      | 108-130-150         | 1.1-1.1-1.2         | 14.1-18.0-20.4  |



## Dimensions

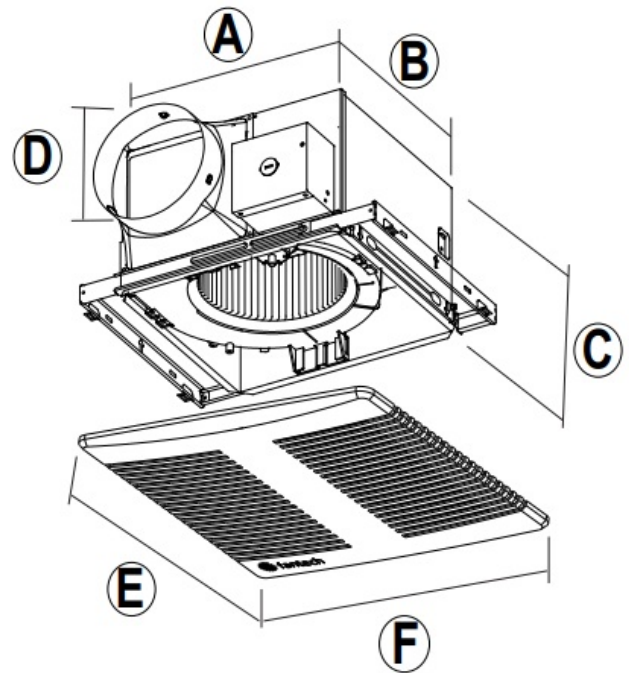

| A            | B            | C           | D       | E        | F            |
|--------------|--------------|-------------|---------|----------|--------------|
| 11 3/8 (289) | 10 1/2 (267) | 7 5/8 (194) | 6 (152) | 13 (330) | 13 3/4 (349) |

Dimensions are in inches (mm).

## Wiring

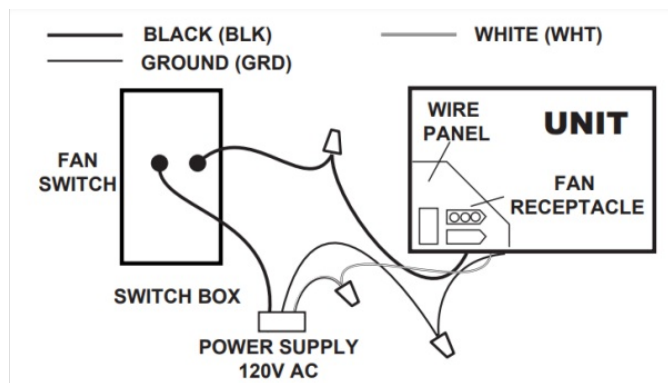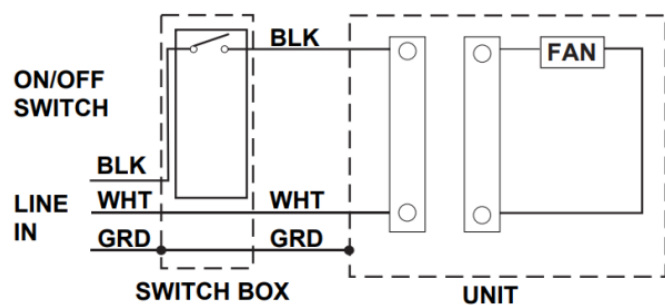

## Accessories

FD60EM Electronic timer (411386)  
HS 6W External Louver Exhaust (45153)  
bathfan Select Radiation Dmpr (494046)  
DHS 05 Humidity/Fan control (494044)

FIDT 6 Insulated Flex Duct (411064)  
6x4 Reducer Bulk pack, 20pcs (484322)  
Ceiling Radiation Damper, Large (98600)

## Documents

484332 Select 110-130-150 Submittal Sheet EN  
E1575 Bathroom Ventilation Solutions EN  
E2161 bathfan Comparison Brochure EN  
484288 IOM Bathfan Select Series EN  
484281 Select 110-130-150 Spec Sheet EN  
Bathfan CSI Specification