



For balanced ventilation without recovery in single-family homes


- Up to 82 cfm @ 0.2" Pst
- Serves 1-2 bedroom homes
- Appliance can be installed in any position
- External three-position switch (Low/Standby/Medium)

[Find more details in our online catalogue](#)


Technical parameters

Product	
Voltage (nominal)	120 V
Frequency	60 Hz
Input power	88 W
Input current	0.7 A
Air flow	82 cfm
Nominal max static pressure (in. w.g.)	0.2 in.wg
Dimensions and weights	
Weight	22 lb
Used for	
Installation type	Horizontal

Dimensions

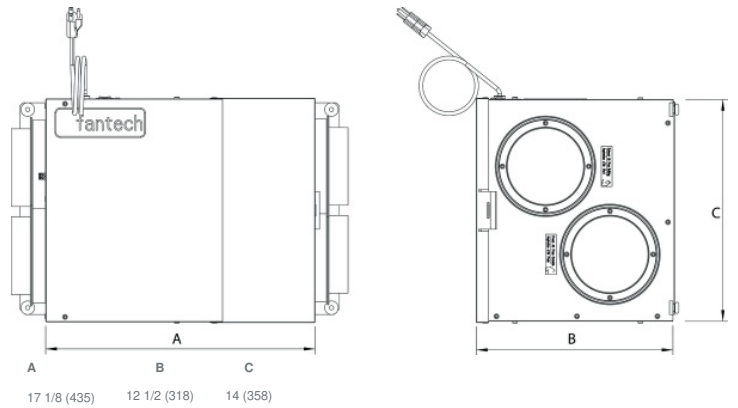

Wiring

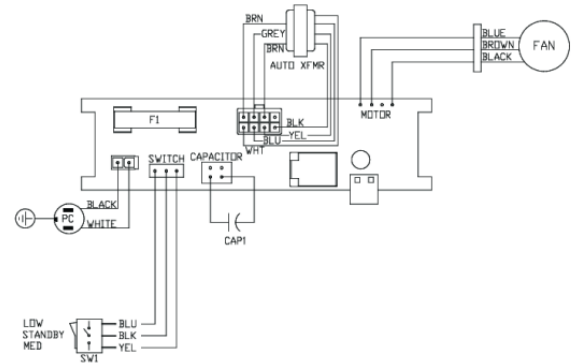

Accessories

- FTD7 7-day digital timer (49792)
- FIDT 4 Insulated Flex Duct (411061)
- MATRIX 6", 2 in 1 Vent Hood (413640)
- CG 5 Contour Grille (40308)
- Filter,MERV8,AEV80,Repl.Kit (445222)

- COM5P Supply and Exhaust Hoods (40223)
- FIDT 5 Insulated Flex Duct (411062)
- CG 4 Contour Grille (40306)
- Filter,MERV13,AEV 80,Repl.kit (414767)

Documents

- 445200 AEV80 IOM EN FR.pdf
- 445340 AEV80 Spec Sheet.pdf