

## SER 5504N

### Energy Recovery Ventilator



#### STANDARD FEATURES

- Energy recovery core United States
- Backward inclined motorized impeller
- Dual service doors & Reversible electrical box
- Push-pull configuration
- External electrical box
- Electrostatic filters
- External low voltage contacts
- Outdoor ducts on the same side

#### OPTIONS & CONTROLS

- MERV6 rated filters
- Compatible with all Fantech HRV/ERV controls
- Double wall panel



|                        |               |                   |  |
|------------------------|---------------|-------------------|--|
| Job Name:              |               |                   |  |
| Job Location:          |               |                   |  |
| Job Reference Number:  |               |                   |  |
| Unit Reference Number: |               |                   |  |
| Engineer:              |               |                   |  |
| Distributor:           |               |                   |  |
| Contractor:            |               |                   |  |
| For Reference:         | For Approval: | For Construction: |  |
| Submitted by:          |               | Date:             |  |
| Address:               |               |                   |  |
|                        |               |                   |  |
|                        |               |                   |  |
| Tel:                   | Fax:          | Email:            |  |
| Notes:                 |               |                   |  |


**United States** 10048 Industrial Blvd. • Lenexa, KS 66061 • 1.800.747.1762 • [www.fantech.net](http://www.fantech.net)  
**Canada** 50 Kanafllakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • [www.fantech.net](http://www.fantech.net)

Fantech reserves the right to make technical changes.  
 For updated documentation please refer to [www.fantech.net](http://www.fantech.net)



## Descriptions

|                       |                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Case:                 | 20 gauge G90 galvanized steel sheet coated with baked powder paint, insulated with 25mm (1 inch) fiberglass with FSK facing for condensation control.                                                                                                                                                                                                                                           |
| Blowers:              | Two maintenance-free Ebm-Papst™ backward inclined motorized impellers with permanently lubricated sealed ball bearings and (TOP) thermal overload protected.                                                                                                                                                                                                                                    |
| Energy recovery core: | The energy recovery core is manufactured from a flame-proof/polyester-based synthetic paper which is designed to transfer sensible and latent heat. During winter, the core transfers heat and moisture from the outgoing air to the incoming fresh air and during summer the core transfers heat and moisture from the incoming air to the outgoing air to essentially reduce the latent load. |
| Filters:              | The exhaust and fresh air streams are protected by MERV1 washable filters constructed to meet UL 900. Optional MERV6 filters are direct replacement to the MERV1. Use of MERV6 filters will add an additional system pressure of 50 Pa (0.20in.wg) at 259 l/s (550cfm).                                                                                                                         |
| Controls:             | External three (3) position (Low / Standby / Medium) rocker switch that will offer continuous ventilation. Compatible with all Fantech HRV/ERV controls.                                                                                                                                                                                                                                        |
| Serviceability:       | Unit has hinged or screwed access panels on front and back. Cores, filters and motors are serviceable from either sides of the unit. Fan assemblies are mounted on a removable sliding base. Energy recovery cores are mounted in slide-out rails for ease of inspection, removal and cleaning. Accessibility to the electrical box is maintained for any unit installation.                    |
| Mounting:             | Unit can be rod mounted or seated on a platform. Flanged connections are provided for suitable ductwork connections. Unit shall be adaptable for easy service of electrical components.                                                                                                                                                                                                         |
| Warranty:             | The energy recovery ventilator is warranted to be free from defect in material, workmanship and all parts for a period of 3 years from the purchase date. The energy recovery core is warranted to be free from defect in material and workmanship for a 5 year period under circumstances of normal use.                                                                                       |

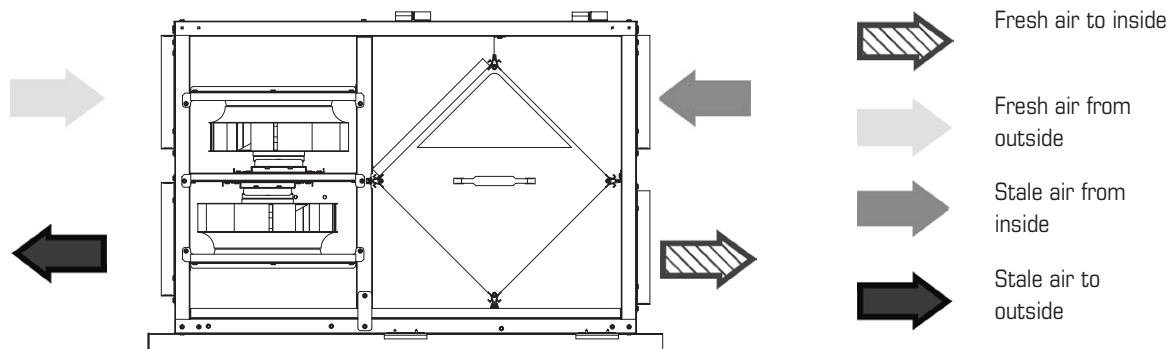


## Specifications


- Volts: 120V
- Phase: Single
- Amperage: 5.4 Amps Total
- Blowers (x2): 115V, 60Hz, 2.7 Amps

- Weight: 168 Lbs (76 Kg)
- Shipping Weight: 208 Lbs (94 Kg)
- Shipping Dim.: 38 x 38 x 27" (965 x 965 x 686mm)


## Ventilation Performance

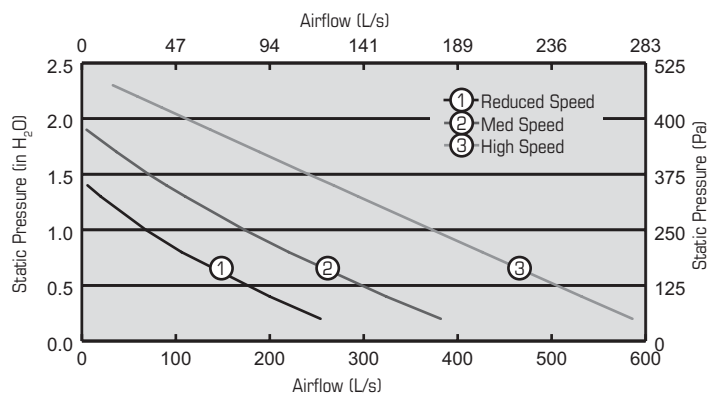

## Energy Performance

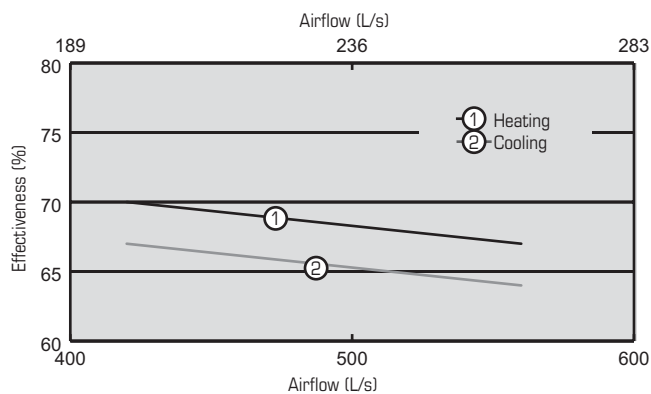

## Dimensions

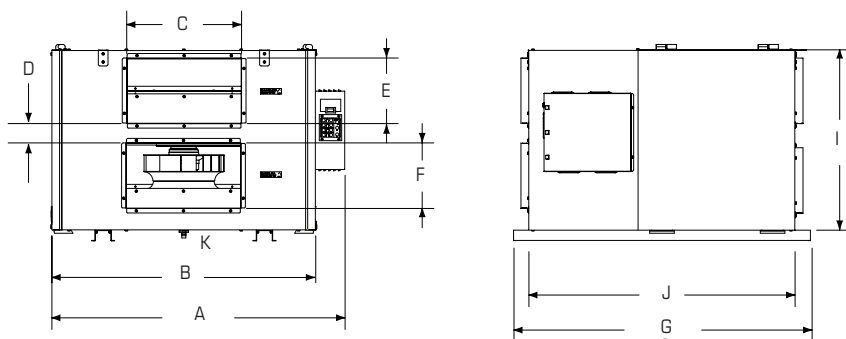

| Model    | A      |     | B      |     | C  |     | D     |    | E  |     | F  |     | G      |     | I  |     | J      |     |
|----------|--------|-----|--------|-----|----|-----|-------|----|----|-----|----|-----|--------|-----|----|-----|--------|-----|
|          | in     | mm  | in     | mm  | in | mm  | in    | mm | in | mm  | in | mm  | in     | mm  | in | mm  | in     | mm  |
| SER5504N | 36 1/3 | 923 | 32 1/5 | 818 | 14 | 356 | 2 2/5 | 61 | 8  | 203 | 8  | 203 | 36 1/3 | 923 | 22 | 559 | 32 1/2 | 826 |

United States 10048 Industrial Blvd. • Lenexa, KS 66061 • 1.800.747.1762 • [www.fantech.net](http://www.fantech.net)  
 Canada 50 Kanaflykt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • [www.fantech.net](http://www.fantech.net)

Fantech reserves the right to make technical changes.  
 For updated documentation please refer to [www.fantech.net](http://www.fantech.net)

