

FQ Series

Quiet Ventilating Fans



FQ 80FL / FQ 110FL

- Airflows of 80 and 110 cfm
- Low profile grille fastened with torsion springs
- Thermal overload protection
- Lit and unlit models with a backdraft damper

FQ 80 / FQ 110




Application


The FQ Series exhaust fans with dampers and fan lights provide remarkably quiet, energy efficient ventilation for baths, powder rooms and other areas. Super quiet with as low as < 0.3 sones sound rating. Air performances of 80 to 110 CFM. Fans are designed for intermittent or continuous operation to meet **ASHRAE Standard 62.2**.

Dimensions

FQ 80FL / FQ 110FL

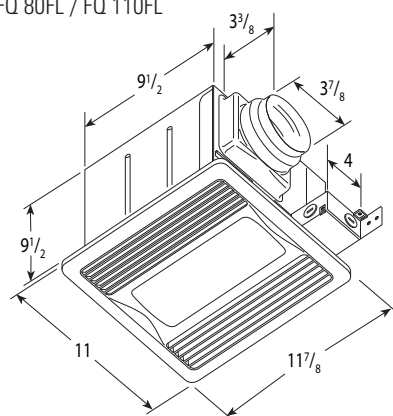

FQ 80 / FQ 110

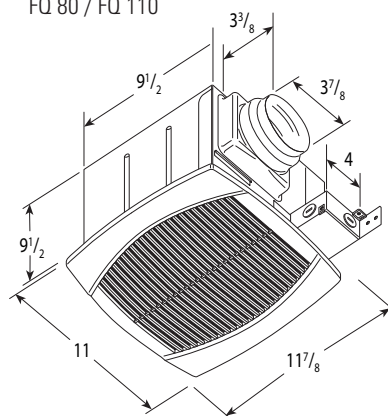

Dimensional information is in inches.

Accessories



FQ-FD
Radiation Damper



HS
Louvered Shutter





FD 60EM
Bathroom Timer



FLD 60
Bathroom Switch

Specification data

Model	ENERGY STAR® Qualified	Duct † size	Rated power	Voltage / phase	0.1" P _s	0.25" P _s	0.4" P _s	CFM per Watt @ 0.1" P _s	Lamp power (Main / Night)	Sones	Shipping weight
		inch	W	V / ~	cfm				W CFL		lbs
FQ 80		4	25	120 / 1	80	68	43	3.4	-	< 0.3	12
FQ 80FL		4	25	120 / 1	80	60	47	3.4	26 / 4	0.4	14
FQ 110		4	30	120 / 1	110	85	70	3.9	-	0.7	13
FQ 110FL		4	30	120 / 1	110	85	70	3.7	26 / 4	1.3	14

Performance ratings do not include the effects of appurtenances in the airstream. † Duct connections are 1/8" smaller than duct size.

Customer Support:

Canada 800.565.3548 • CANADAsupport@fantech.net • www.fantech.net

Fantech reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position.



fantech®
a systemair company