

Matrix Hood

2-in-1 Ventilation Hood

Product #: 413640




Specifications

Material:	22 gauge Galvanized
Finish:	UV Rated baked enamel
Colour:	White
Complies with:	CSA/F326 Standard
Transition:	- UL 94 Rated - Thermal Value R4.0
Net Weight:	4.5 Lbs
Shipping Weight:	5 Lbs

Features & Benefits

- Low profile 2 in 1 ventilation hood
- Single port 7¹/₁₆ (179 mm) x 8¹/₁₆ (205 mm) to exterior wall
- Insulated transition duct connections (R 4,0 / UL 94 Rated)
- Simple and easy to install
- Oval 6" dia. connections
- Compatible with HRV/ERV appliances (up to 150 cfm)
- Residential or condo applications
- Durable powder coated white galvanized metal
- Screen design prevents birds & rodents from entering
- 100% U.V. Resistant
- Can be painted for colour choice

Airflow & installation

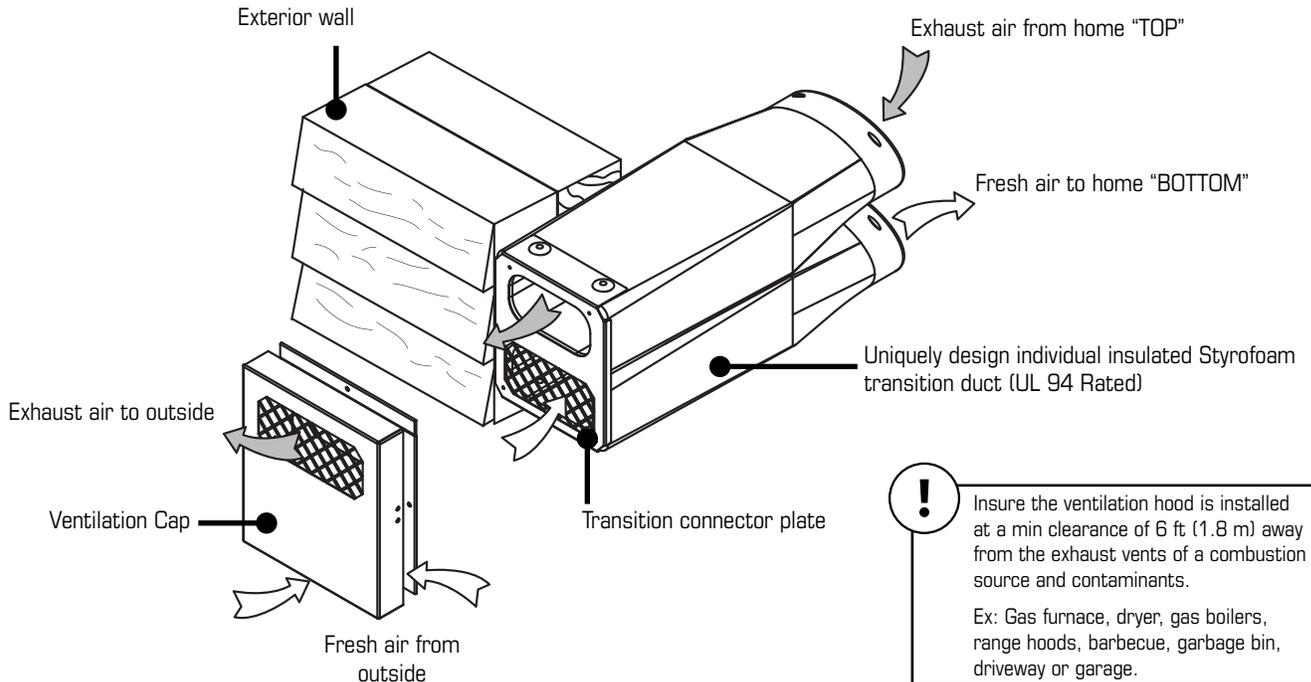


IMPORTANT: Install ventilation hood a minimum of 18" (457 mm) above grade.

Do not install under a deck, enclose porch, patio, garages, crawl spaces or attics.




fantech[®]
a systemair company



Dimensions

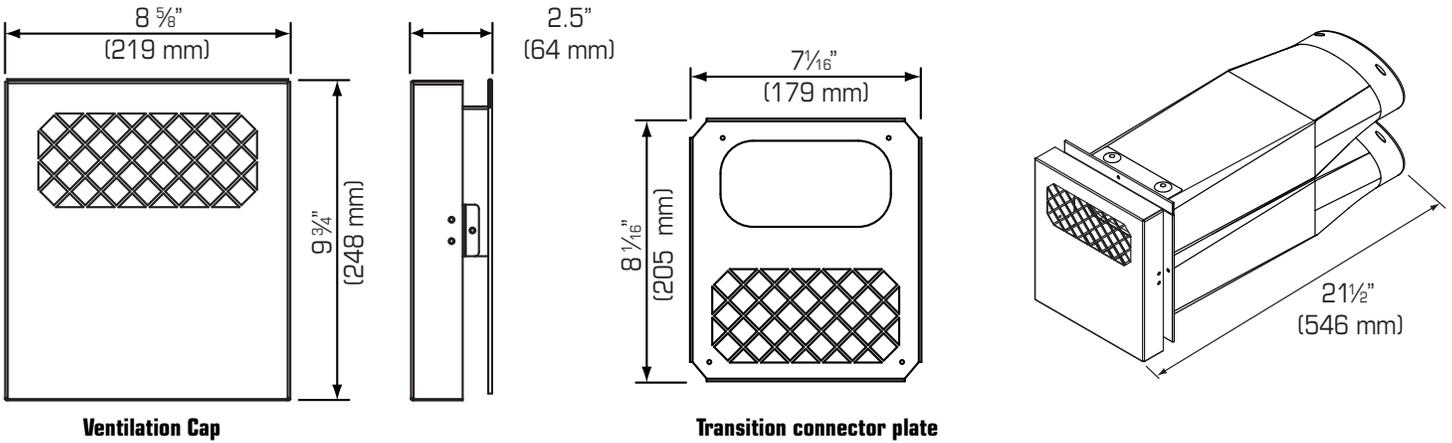

Clearance – Assembled Transition Ducts

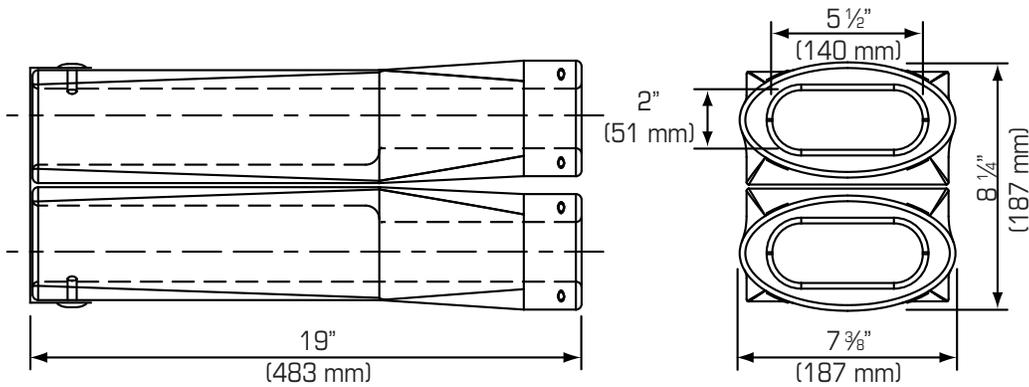

Airflow Performance Data

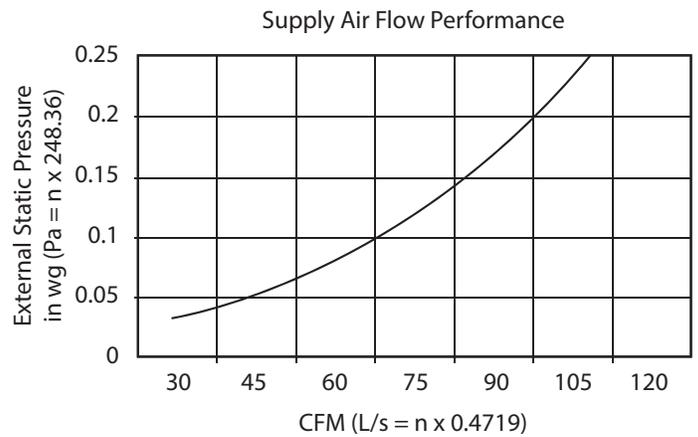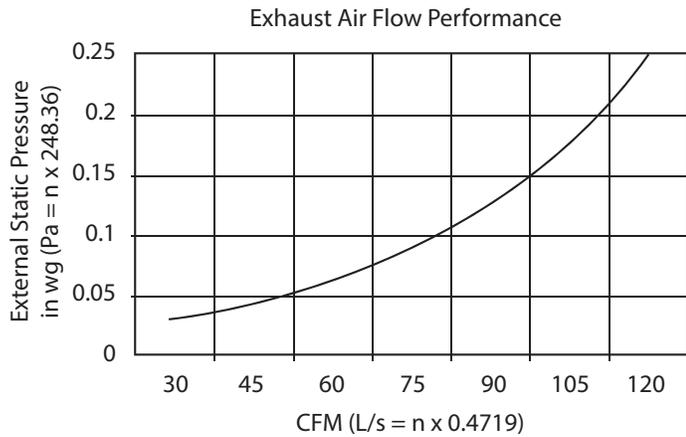

LIMITATIONS: This product is for residential applications only. Must be installed in accordance with all current national and local regulation building safety codes.

Contacts

Submitted by:	Date:
Quantity:	Model:
Project #:	
Comments:	
Location:	
Architect:	
Engineer:	Contractor:

Distributed by: