


RE(C) Series

Exterior Roof / Wall Centrifugal Fans

STANDARD FEATURES

- Galvanized steel housing with powder coat finish
- Powered by external rotor motorized impeller
- Permanently lubricated sealed ball bearings
- 100% speed controllable
- Automatic reset thermal overload protection
- Five-year factory warranty

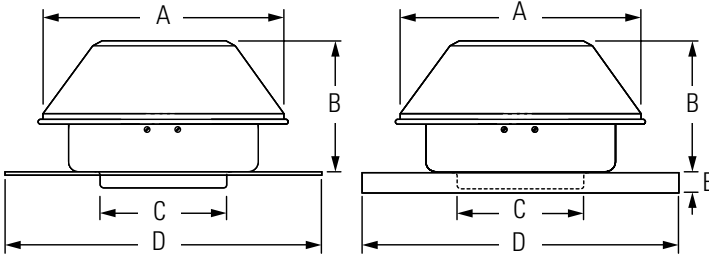

| Model | A | B | C | D | E ² | Metal Gauge | Weight |
|-----------------------------|----------------------------------|----------------------------------|----|--------------------------------|-------------------------------|-------------|--------|
| RE 54 / REC 54 ¹ | 10 ¹⁵ / ₁₆ | 6 | 5 | 15 ¹ / ₂ | 1 ¹ / ₂ | 22 | 11 |
| RE 6 / REC 6 | 13 ¹⁵ / ₁₆ | 6 ¹ / ₄ | 6 | 15 ¹ / ₂ | 1 ¹ / ₂ | 22 | 14 |
| RE 8XL / REC 8XL | 16 ⁹ / ₁₆ | 5 ¹⁵ / ₁₆ | 8 | 20 | 1 ¹ / ₂ | 22 | 19 |
| RE 10XL / REC 10XL | 20 ¹³ / ₁₆ | 11 ¹ / ₂ | 10 | 20 | 1 ¹ / ₂ | 22 | 31 |
| RE 10XLT / REC 10XLT | 20 ¹³ / ₁₆ | 12 ¹¹ / ₁₆ | 10 | 20 | 1 ¹ / ₂ | 22 | 33 |

All dimensions in inches. Weights in pounds.

¹ Supplied with 5" to 4" reducer

² For REC models only



Fantech Inc. certifies that the FKD Series shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

| Fan Specifications | | | | | | | Motor Specifications | | | | |
|--------------------|-----|-----------|-----|-----|----|---------|----------------------|-------|-------|-------|------|
| Line | Qty | Model No. | Tag | CFM | SP | Fan RPM | Watts | Volts | Phase | Hertz | Encl |
| 1 | | | | | | | | | | | |
| 2 | | | | | | | | | | | |
| 3 | | | | | | | | | | | |
| 4 | | | | | | | | | | | |

| Accessory Items | 1 | 2 | 3 | 4 | Accessory Items | 1 | 2 | 3 | 4 |
|-----------------|---|---|---|---|-----------------|---|---|---|---|
| | | | | | | | | | |
| | | | | | | | | | |

Project: _____ Submitted: _____
 Customer: _____ Approved: _____
 Location: _____