


RE(C) Series

Exterior Roof / Wall Centrifugal Fans

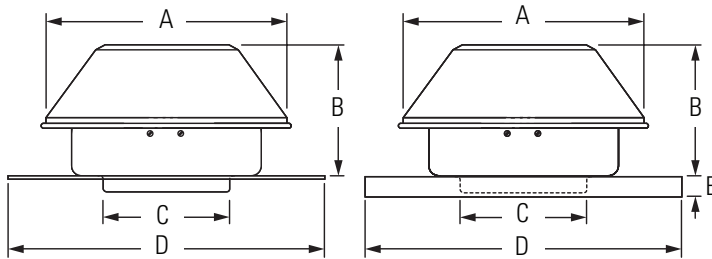

STANDARD FEATURES

- Galvanized steel housing with powder coat finish
- Powered by external rotor motorized impeller
- Permanently lubricated sealed ball bearings
- 100% speed controllable
- Automatic reset thermal overload protection
- Five-year factory warranty



Model	A	B	C	D	E ²	Metal Gauge	Weight
RE 54 / REC 54 ¹	10 ¹⁵ / ₁₆	6	5	15 ¹ / ₂	1 ¹ / ₂	22	11
RE 6 / REC 6	13 ¹⁵ / ₁₆	6 ¹ / ₄	6	15 ¹ / ₂	1 ¹ / ₂	22	14
RE 8XL / REC 8XL	16 ⁹ / ₁₆	5 ¹⁵ / ₁₆	8	20	1 ¹ / ₂	22	19
RE 10XL / REC 10XL	20 ¹³ / ₁₆	11 ¹ / ₂	10	20	1 ¹ / ₂	22	31
RE 10XLT / REC 10XLT	20 ¹³ / ₁₆	12 ¹¹ / ₁₆	10	20	1 ¹ / ₂	22	33

All dimensions in inches. Weights in pounds.

¹ Supplied with 5" to 4" reducer

² For REC models only



Fantech Inc. certifies that the FKD Series shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

Fan Specifications							Motor Specifications				
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Encl
1											
2											
3											
4											

Accessory Items	1	2	3	4	Accessory Items	1	2	3	4

Project: _____ Submitted: _____
Customer: _____ Approved: _____
Location: _____

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanafflakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
For updated documentation please refer to www.fantech.net

 **fantech**®
a systemair company