


FIT[®] 120E
Fresh Air Appliance (FAA/ERV)
Product #: 463401



Download
BIM model
and Specs



FIT 120 E
Product Name CFM @ 0.4 in. w.g. Energy Recovery

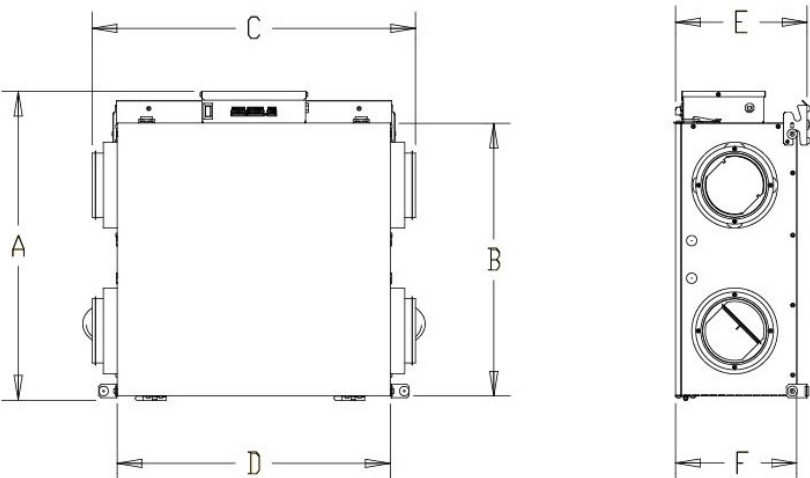

A		B		C		D		E		F	
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm

23 5/8 600 20 3/4 527 24 5/8 625 20 7/8 529 10 254 9 1/4 235

Clearance of 8.5 in. (216mm) in front of the appliance is recommended for removal of core. All appliances feature three foot plug-in power cord with 3-prong plug.

STANDARD FEATURES

- Warm supply and return air on the right-hand side
- Average airflow: 127 cfm (60 L/s) @ 0.4 in. wg (100Pa)
- Compact design: 20 7/8 in. x 23 5/8 in. x 9 1/4 in. (529mm x 600mm x 235mm)
- Lightweight: 34lbs (15kg) including core
- Easy to install on ceiling or wall with mounting bracket included
- Energy recovery core
- Electrostatic filters (washable)
- No drain required
- Removable screw terminal for easy connection with external access
- Multiple speed operation
- Recommended Control: ECO-Feel[®] AUTO IAQ – Automatic IAQ Control

Fan Specifications							Motor Specifications								
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Insulation Class				
1											A				
2											A				
3											A				
Accessory Items				1	2	3	4	Accessory Items				1	2	3	4

Project: _____ Submitted: _____
Customer: _____ Approved: _____
Location: _____

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanafllakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
For updated documentation please refer to www.fantech.net

