
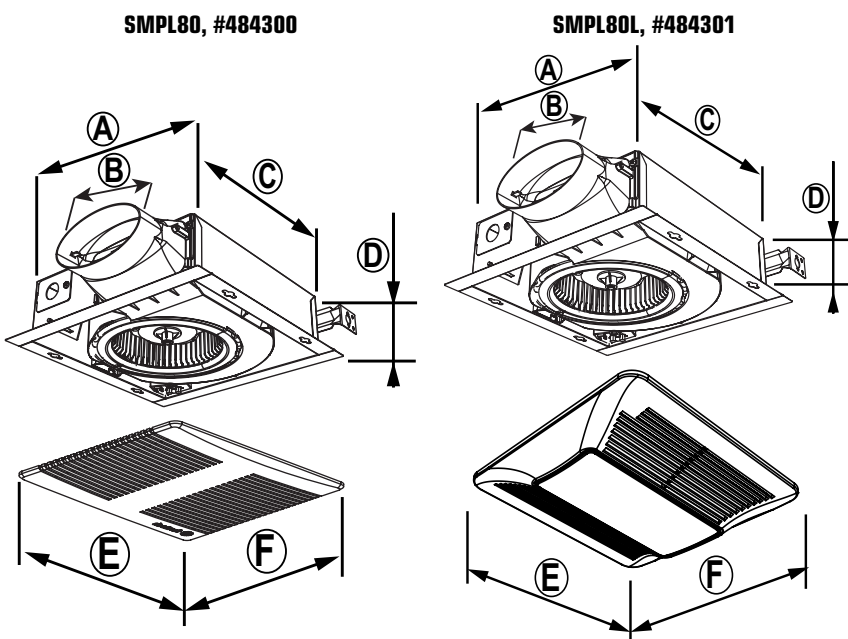


bathfan Simple SMPL80 Series

Bathroom Exhaust Fans

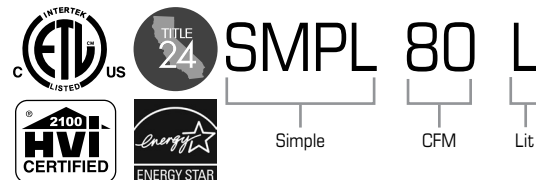

STANDARD FEATURES

- 80 CFM (38 L/s) @ 0.1 in. wg. (25 Pa)
- Quiet operation: 1.1 Sones
- Low Profile Design – ideal for 2x4 joist construction and taller
- Energy-efficient, permanently lubricated motor
- Ceiling Radiation Damper – bathfan Simple (SMPL) Series to be used with the UL555C Fantech Ceiling Radiation Damper—Small (Model #: 98599, sold separately) or the UL555C Fantech Ceil. Radiation Damper (Model #: 484374, sold separately)
- Includes an 11W, 4000K cool white LED lighted grille (on SMPL80L models only)
- Built-in, soft-close backdraft damper
- Includes one adjustable hanger bar to fit a multitude of applications
- Duct connector included: 4 in. (101mm)
- 5 year limited warranty

Model	A		B		C		D		E		F		Metal Gauge	Weight		ENERGY STAR®
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm		lb	kg	
SMPL80 (#484300)	10-1/4	260	4	102	10-1/4	260	3-3/8	86	13-3/4	321	13	330	26	6.2	2.8	•
SMPL80L (#484301)														6.8	3.1	

Fan Specifications								Motor Specifications				
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Insulation Class	
1											A	
2											A	
3											A	

Accessory Items	1	2	3	4	Accessory Items	1	2	3	4
-----------------	---	---	---	---	-----------------	---	---	---	---

Project: _____ Submitted: _____
Customer: _____ Approved: _____
Location: _____

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanafllakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
For updated documentation please refer to www.fantech.net

 **fantech**®
a systemair company