
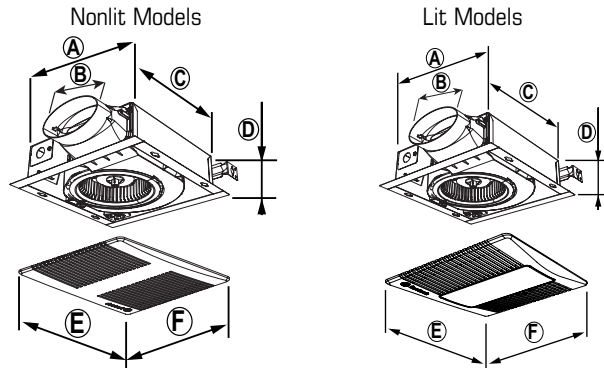


bathfan Select Fit (SF) Series

Bathroom Exhaust Fans

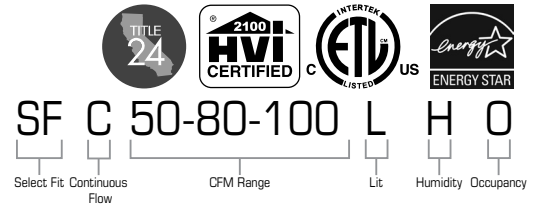

STANDARD FEATURES

- Selectable airflow settings: 50/80/100 CFM (24/38/47 L/s)
- Quiet operation: 0.6–1.0–1.5 Sones
- Low Profile Design – ideal for 2x4 joist construction and taller
- Energy-efficient, self-compensating DC motor
- Continuous Flow (available with applicable models)
- Humidity Sensor (available with applicable models)
- Occupancy Sensor (SFC50-80-100LHO)
- Time Delay (SFC50-80-100 & SFC50-80-100L)
- Ceiling Radiation Damper – bathfan Select Fit (SF) Series to be used with the UL555C Fantech Ceiling Radiation Damper—Small (Model #: 98599, sold separately) or the UL555C Fantech Ceil. Radiation Damper (Model #: 484374, sold separately)
- Includes an 11W, 4000K cool white LED lighted grille (on applicable models only)
- Built-in, soft-close backdraft damper
- Includes one adjustable hanger bar to fit a multitude of applications
- Duct connector included: 4 in. (101mm)
- 5 year limited warranty

Model	A	B	C	D	E	F
in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)
SF50-80-100 (#484305)	10- ¹ / ₄ (260)	4 (102)	10- ¹ / ₄ (260)	3- ³ / ₈ (86)	13- ³ / ₄ (321)	13 (330)
SF50-80-100L (#484306)						
SFC50-80-100 (#484307)						
SFC50-80-100H (#484308)						
SFC50-80-100HO (#484309)						
SFC50-80-100L (#484310)						
SFC50-80-100LH (#484311)						
SFC50-80-100LHO (#484312)						

Fan Specifications							Motor Specifications				
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Insulation Class
1											A
2											A
3											A

Accessory Items	1	2	3	4	Accessory Items	1	2	3	4

Project: _____ Submitted: _____
Customer: _____ Approved: _____
Location: _____

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanaflykt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
For updated documentation please refer to www.fantech.net

 **fantech**®
a systemair company